

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BVP 18/45, BVP 18/45 D



Compact

Guide handle fully foldable



Robust and reliable

V-belt all around protected against damage




Safe transport

Transport handles (standard) and transport wheels (optional)

Shipping dimensions in cub.yd

BVP 18/45	0.195
BVP 18/45 D	0.237

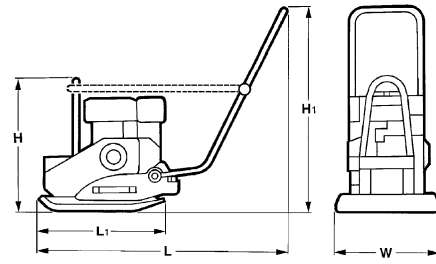

Standard Equipment

- Vibration insulated steering bow, foldable
- Detachable steering handle
- Highly wear resistant base plate
- Automatic shutdown at low oil level (BVP18/45)
- Recoil starter
- Single point lifting device
- Fully protected V-belt
- Carrying handles
- 3-2-1 Warranty
- Engine protection frame (BVP18/45D)
- Automatic decompression (BVP18/45D)

Dimensions in in

	H	H1	L	L1	W
BVP 18/45	21.1	36.0	43.9	22.0	17.7
BVP 18/45 D	25.6	36.0	43.9	22.0	17.7

Optional Equipment

- Sprinkler system (+15.4lb)
- Transport wheels (+8.8lb)
- Plastic mat
- Tool kit
- Service Kit
- TOUGH WARRANTY
- Comfort guide handle
- Special painting
- Engine protection frame (BVP18/45)

Technical Data

Weights

Operating weight CECE	lb	201
Basic weight	lb	198

Dimensions

Working width	in	17.7	17.7
---------------------	----	------	------

Driving Characteristics

Working speed, max.	ft/min	82.0	82.0
Max. gradeability (dep. on soil con.)	%	30	30

Drive

Engine manufacturer	Honda	Hatz	
Type	GX 160	1B20	
Emission stage	StageV/CARB P.3	Stage V	
Cooling	air	air	
Number of cylinders	1	1	
Performance SAE J 1349	hp	4.8	4.2
Speed	min-1	3.600	3.000
Drive system	mech.	mech.	
Fuel	Gasoline	Diesel	
Fuel consump. aver. during operation	gal/h	0.3	0.2

Exciter system

Frequency	vpm	90	90
Centrifugal force	lb	18.00	18.00
Amplitude	in	0.064	0.064

Capacities

Fuel	gal	0.8	0.8
Water	gal	1.8	1.8

Technical modifications reserved. Machines may be shown with options.



PRUS 834 12 010

150519 Sa04

BOMAG Americas, Inc.
 125 Blue Granite Parkway
 Ridgeway, SC 29130
 USA
 Tel. +1 803 3370700
 Fax +1 803 3370800
 www.bomag.com/us

