

TEXAS PNEUMATIC TOOLS, INC.

AIR MANIFOLDS

A.S.M.E. CERTIFIED

EACH MODEL MEETS ALL OSHA REQUIREMENTS

Use with our
NEW Moisture
Separating Systems
for Clean, Dry Air



We have the right size for your needs.

MODEL #	CAPACITY	WEIGHT (lb)	HEIGHT	LENGTH	TANK DIAMETER	WIDTH w/ FITTINGS	INLET SIZE	NO. OF OUTLETS	OUTLET SIZE (Qty)	WORKING PRESSURE (psi)	TEST PRESSURE (psi)	CONNECTOR DETAILS
TX-2AMF	15 Gallon	63	18"	39"	12"	22"	2"	8	3/4"	200	260	INLET: 4-Prong crowfoot. OUTLETS: Safety auto exhaust ball valve w/ locking handle & 2-Prong crowfoot
TX-3AMF	2.5 Gallon	21-23	12"	20"	8"	14"	1"	4	1/2"	200	260	INLET: 2-Prong crowfoot. OUTLETS: Safety auto exhaust ball valve w/ locking handle & 2-Prong crowfoot, Quick connect models available with 1/4", 3/8" & 1/2" fittings
TX-4AMF	30 Gallon	115	27"	44"	16"	36"	3"	8	3/4" (2) 1" (4) 2" (2)	200	260	INLET: 4-Prong crowfoot. OUTLETS: Safety auto exhaust ball valve w/ locking handle & 2-Prong crowfoot & 4-Prong crowfoot
TX-5AMF	60 Gallon	193	31"	54"	20"	39"	3"	8	3/4" (2) 1" (4) 2" (2)	200	260	INLET: 4-Prong crowfoot. OUTLETS: Safety auto exhaust ball valve w/ locking handle & 2-Prong crowfoot & 4-Prong crowfoot
TX-6AMF	10 Gallon	51	16"	36"	10"	20"	2"	8	3/4"	150	195	INLET: 4-Prong crowfoot. OUTLETS: Safety auto exhaust ball valve w/ locking handle & 2-Prong crowfoot. California permit exempt.
TX-10099	Safety Cage	137	For use with TX-2AMF & TX-6AMF. Protects valves from breakage. Round design allows one person to roll unit into place. Can be stacked for storage. Galvanized for long life.									Manifolds can be custom configured with many other type fittings.


www.airtools.com

Email: tptinfo@airtools.com

TEXAS
1-800-231-9740
254-587-2533 (Int'l calls)

NEVADA
1-800-858-1222

VIRGINIA
1-800-626-1091

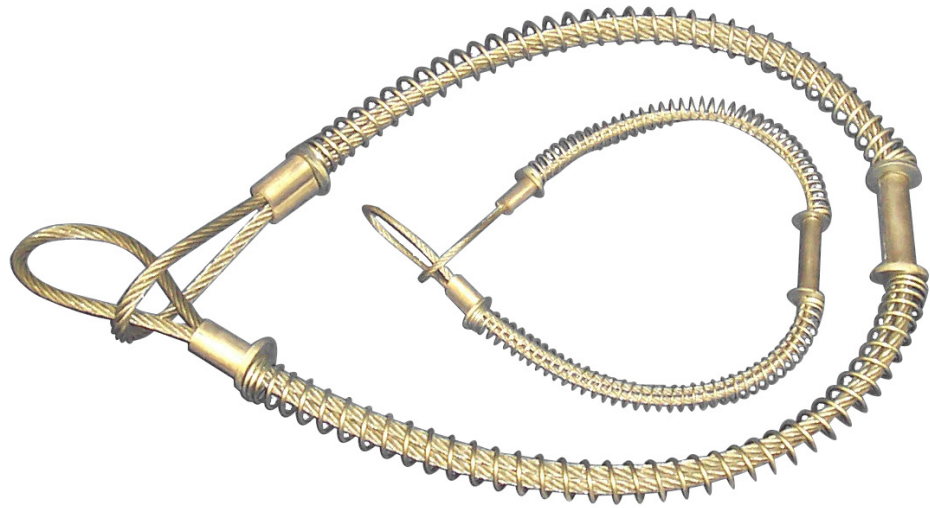

**Safety Lock Cables
TX-SLC1 & TX-SLC2**



Air Flow Check Valves



Portable FRL Systems from 1/2" to 1-1/2" NPT